

**LITHIUM-ION BATTERY PRODUCT
SPECIFICATION
CMLB-51-200- WM**



Battery Pack Specification

1. Overview


Crown Micro CMLB-51-200-WM is 51.2V200Ah Lithium iron phosphate battery module which designed for energy storage power supply system application. This battery module integrated with intelligent BMS inside, has big advantages on safety, cycle life, energy density, temperature range and environmental protection. This product specification describes the type, size, structure, electrochemistry performance, service life, and BMS characteristics. This specification only applies to the battery module supplied by Crown Micro.

2. Advantages

The battery module consists of single LFP cells, wire, BMS and container.

- Packed with high performance LFP single cell, long life, safety and wide temperature range
- High energy density, small size, light weight, no pollution
- Packing with single cell container, fire retardant wire and laser welding, stable and safe
- Built-in BMS, with battery voltage, current, temperature and health management
- LED indicate the battery SOC and operating status
- LCD Screen display the battery voltage, current, temp.,SOC detail information
- Support communicate with solar inverter bu CAN or RS485
- Update software by RS485 port
- Flexible customization of dimensions
- More than 15 years design life
- Stable performance, maintenance-free


3. Product Photos

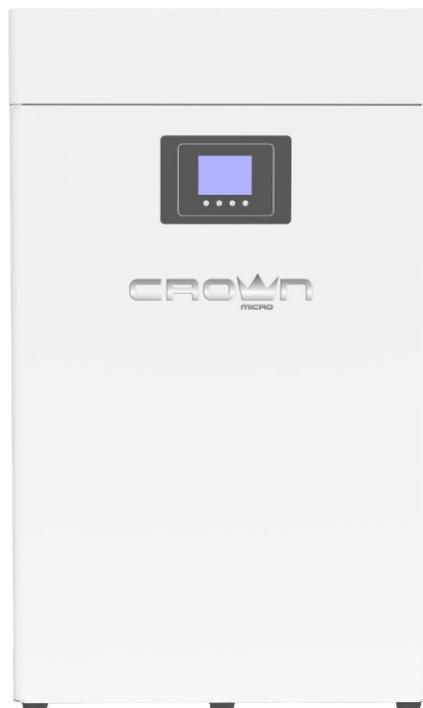

4. Battery module specification

Item		Specification	Conditions
Nominal	Voltage	51.2V	25°C,0.2C
	Capacity	200Ah	
Module weight		88.7kg	±1kg
Dimensions(W*D*H), mm		455*750*230	±2mm
Operating parameters	Charging Voltage	56.0V~57.0V	Recommended 100A
	Discharging Voltage	44.8V	
	Charging current	ax constant charge: 200A	
	Discharging current	ax constant charge: 200A	
Temperature	Charge range	0°C~50°C	
	Discharge range	-20°C~55°C	
	Storage range	-20°C~55°C	
BMS	Built-in BMS	Voltage, current, temperature management & cell balance	RS485,CAN communication
Service life	Design life	>15years	25°C
	Cycle life	>5000 times, 0.5C, 80%DOD	

5. View Drawing

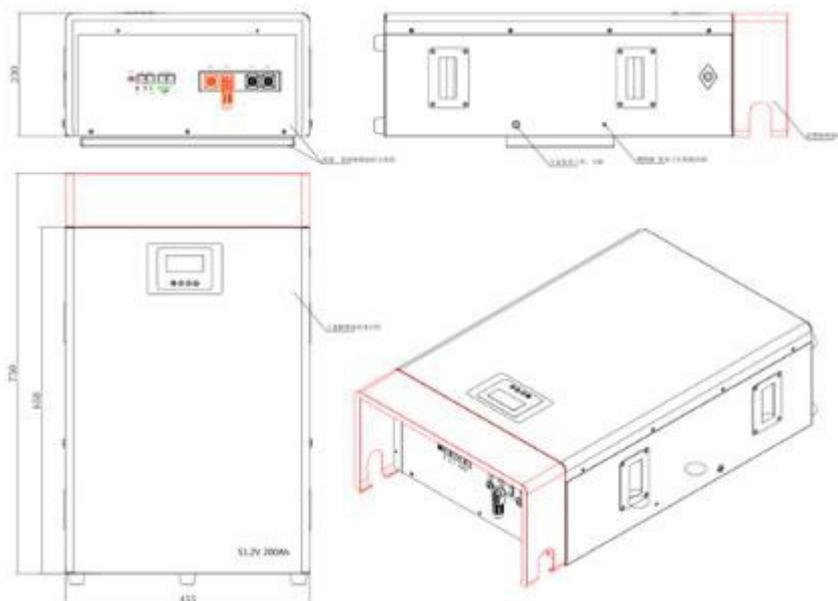

6. Panel Description

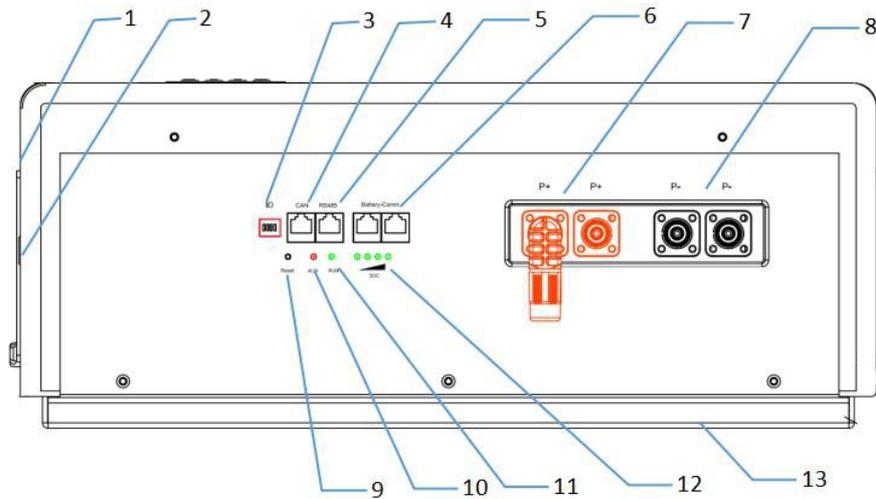


Table 6-2 Front panel interface description

No.	Item	Function Description	Remarks
1	Handle	For carrying, handling	On the side
2	ON/OFF	Button Switch on/off the BMS	On the side
3	ID	Assign address of every model	See Table 3.4
4	CAN	CAN Communication interface	
5	RS485	RS485 Communication interface	
6	Battery Comm	Connect inverter communication port	Only for Voltronic inverter
7	Terminals	Positive	Plug-in type
8	Terminals	Negative	Plug-in type
9	RESET	Emergency restart button	
10	ALM	Alarming indicates LED	4 nos green LED
11	RUN	Operating indicates LED	
12	SOC	The state of charge	
13	Mounting bracket	Mounting bracket	

7. BMS specification

BMS provides complete management and protection for the battery.


- Voltage warning and protection for module and each single cell.
- Current warning and protection, and the maximum operating current can be customized.
- Temperature warning and protection, 4 sensors for battery pack and 1 sensor for BMS.
- Battery module SOC and SOH calculation, display the accurate battery status.
- Communicate with inverter or PC monitor, report the battery data.
- Pre-charge and pre-discharge logic, make sure safety use in whole process.
- Switch-off mode, sleep mode, and operating mode, different mode for different condition.

► BMS parameters.


Item		Parameters		Condition
Charge	Cell voltage protection	3.8V	Delay 1s	Recovery at 3.45V
	Module voltage protection	60.0V	Delay 1s	Recovery at 55.2V
	Over charging current 1	>205A	Delay 10s	
	Over charging current 2	≥225A	Delay 3s	
	Temperature protection	<-5°C or >70°C	Delay 1s	Recover when >0°C or <60°C
Discharge	Cell voltage protection	2.3V	Delay 1s	Recovery at 3.1V
	Module voltage protection	44.8V	Delay 1s	Recovery at 48V
	Over discharging current 1	> 205A	Delay 30s	Recovery in 60s
	Over discharging current 2	> 300A	Delay 3s	Recovery in 60s
	Short circuit	>600A	< 0.1mS	
	Temperature protection	<-20°C or >75°C	Delay 1s	Recover when >-10°C or <65°C
BMS	PCB Temp protection	>110°C	Delay 1s	Recover when <80°C
	Cell balance	120mA	Passive balance	Cell voltage difference > 40mV
	Temperature accuracy	3%	Cycle measurement	Measuring range -40~100°C
	Voltage accuracy	0.5%	Cycle measurement	For cells and module
	Current accuracy	3%	Cycle measurement	Measuring range -200~+200
	SOC	5%		Integral calculation
	Power consumption with different condition	<300uA	Switch-off mode	Storage & transportation
		<14mA	Operating mode	Charging & discharging
Communication ports	RS485/CAN		Can be customized	

8. Battery module performance Curve


Charge & Discharge curve with 0.5C @ 25°C

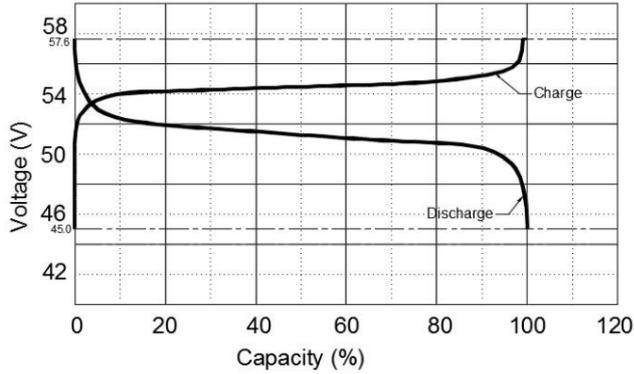


Discharge performance with different rate @ 25°C

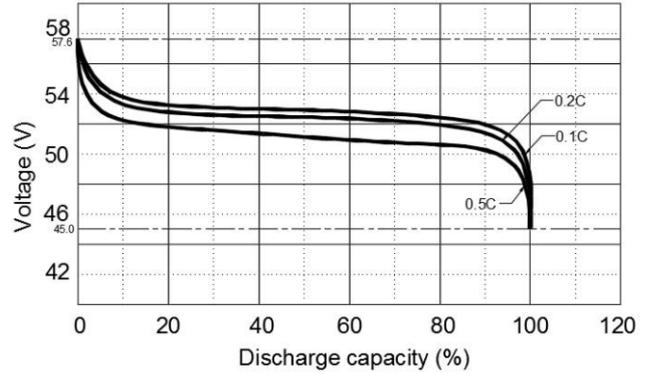

Discharge capacity with different temperature @ 0.5C

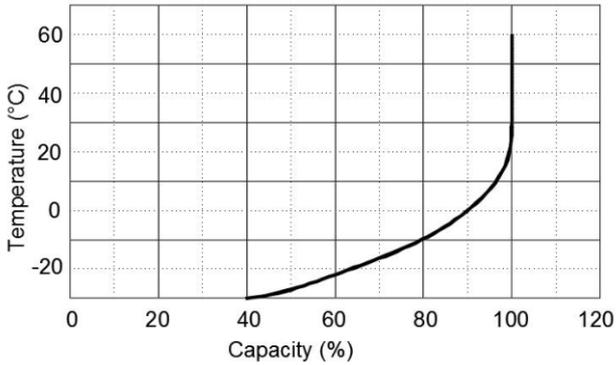

Cycle Life with DOD @ 0.5°C, 25°C

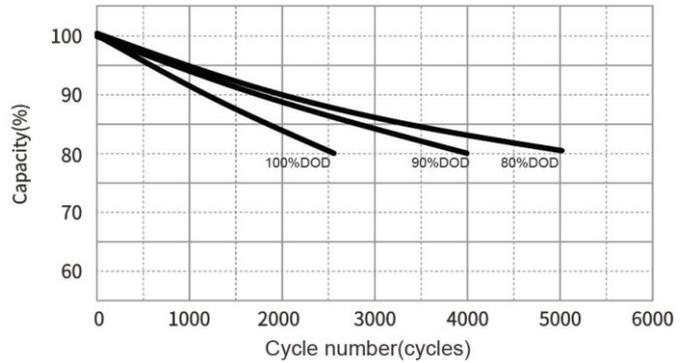

Self-discharge @ different temperature

