

Reliable Power for the Journey Ahead

JA SOLAR

740W

JAM66D46 LB n-type Double Glass Bifacial Modules

Premium Cells

n-
Bycium+
18BB

MBB Half-Cell
Technology


Premium Modules

Superior energy yield for lower LCOE

High-efficiency with advanced n-type Bycium+ cell technology

Higher power output with High-density module design

Excellent reliability, certified by authoritative institutions

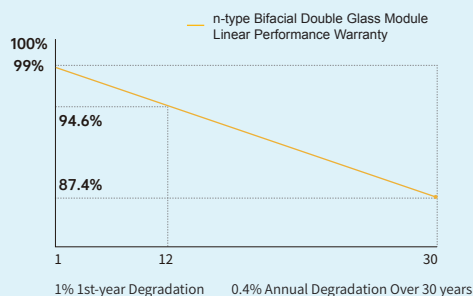


12 12-year product warranty

30 30-year linear power output warranty


Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing

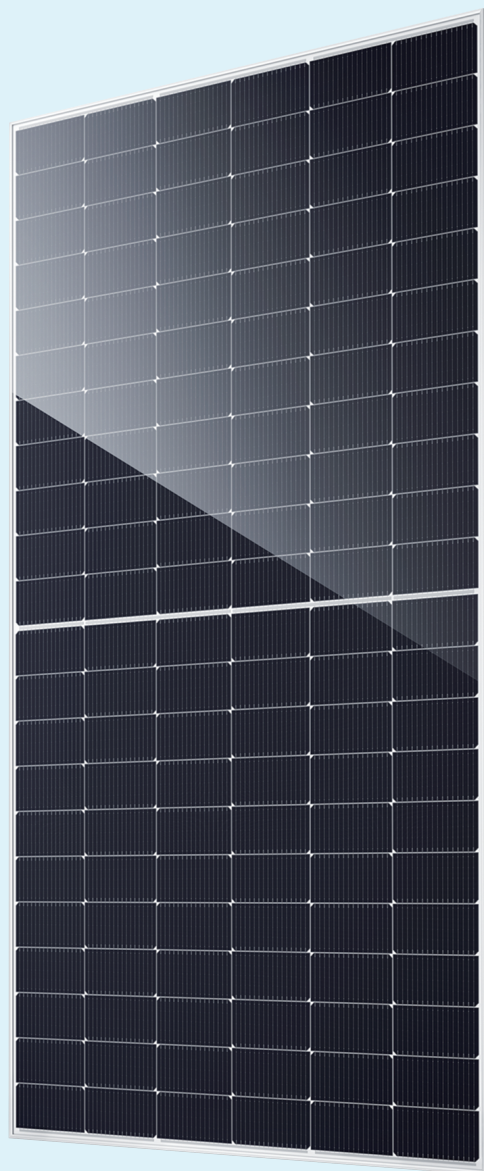

JAM66D46 LB

n-type Double Glass Bifacial Modules

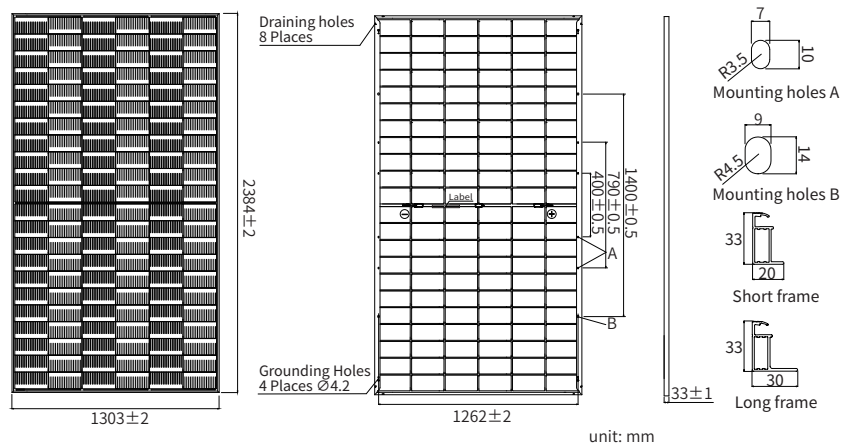

MECHANICAL PARAMETERS

Cell	Mono
Weight	37.7kg
Dimensions	2384±2mm×1303±2mm×33±1mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	132(6×22)
Junction Box	IP68, 3diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 400mm(+)/200mm(-) Landscape: 1400mm(+)/1400mm(-)
Frame	Anodized Aluminium Alloy
Front Glass	2.0mm, Anti-reflection Coating
Back Glass	2.0mm, Heat Strengthened Glass
Packaging Configuration	33pcs/Pallet, 594pcs/40HQ Container

Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC



TYPE	JAM66D46 -715/LB	JAM66D46 -720/LB	JAM66D46 -725/LB	JAM66D46 -730/LB	JAM66D46 -735/LB	JAM66D46 -740/LB
Rated Maximum Power(P _{max}) [W]	715	720	725	730	735	740
Open Circuit Voltage (V _{oc}) [V]	48.80	49.00	49.20	49.40	49.60	49.80
Maximum Power Voltage(V _{mp}) [V]	41.00	41.19	41.39	41.58	41.77	41.96
Short Circuit Current(I _{sc}) [A]	18.55	18.59	18.63	18.67	18.70	18.73
Maximum Power Current(I _{mp}) [A]	17.44	17.48	17.52	17.56	17.60	17.64
Module Efficiency [%]	23.0	23.2	23.3	23.5	23.7	23.8
Power Tolerance	0~+3%					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.250%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.290%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL PARAMETERS AT BNPI

TYPE	JAM66D46 -715/LB	JAM66D46 -720/LB	JAM66D46 -725/LB	JAM66D46 -730/LB	JAM66D46 -735/LB	JAM66D46 -740/LB
Rated Max Power(P _{max}) [W]	785	795	800	806	811	817
Open Circuit Voltage(V _{oc}) [V]	48.80	49.00	49.20	49.40	49.60	49.80
Max Power Voltage(V _{mp}) [V]	41.00	41.19	41.39	41.58	41.77	41.96
Short Circuit Current(I _{sc}) [A]	20.37	20.52	20.57	20.61	20.64	20.68
Max Power Current(I _{mp}) [A]	19.15	19.30	19.34	19.39	19.43	19.47
BNPI	Front Irradiance 1000W/m ² , Rear Irradiance 135W/m ² , cell temperature 25°C, AM1.5G					

CHARACTERISTICS

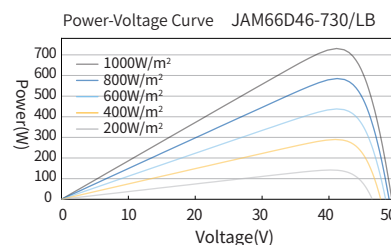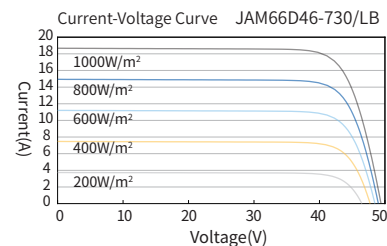

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature*	-40°C~+70°C
Maximum Series Fuse Rating	35A
Maximum Static Load, Front	5400Pa(112 lb/ft ²)
Maximum Static Load, Back	2400Pa(50 lb/ft ²)
NOCT	45±2°C
Bifaciality	80%±5%
Safety Class	Class II
Fire Performance	UL Type 29/Class C

*PV module 98th percentile operating temperature : 70°C